


CAD 20 T

ABS SOUND PROJECTOR

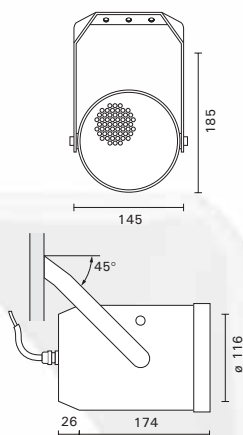

ABS Sound projector watertight

- In-built UV protection
- Aluminium U bracket
- Dual cone polypropylene speaker
- Power 20W
- 100V transformer
- Max/min operating temperature 85°C/-20°C
- SPL 1W/1m 92dB
- Dispersion (-10dB) 1kHz/4kHz 180°/70°




Frequency Response curves on page 65

CAD 20 T

Characteristics	Dual cone loudspeaker with transformer
Mounting system	Stainless steel U bracket
Rated power	20W
Colour	White
Frequency response	110Hz~18kHz
Sensitivity 1W/1m	92dB
Maximum SPL 1m	105dB
Input voltage	100V
Operating temperature	-20°C~85°C
Weight	1.9kg
Dimensions	ø 145 x 200mm

SP 106 WP/SP 106 BWP

IP44 RATED ABS SOUND PROJECTORS

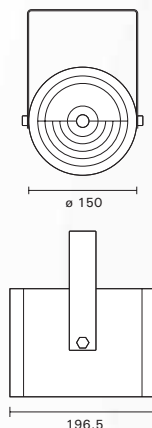

- **SP 106 WP** - Weatherproof ABS Sound Projector
- **SP 106 B/WP** - Bi-directional weatherproof ABS sound projector

IP44 Weatherproof ABS sound projector

- Power 1.5, 3, 6W
- 100V transformer
- Complete with steel bracket
- 5.5" plastic loudspeaker
- Frequency response 150Hz~20kHz
- Max/min operating temperature 85°C/-20°C
- SPL@1W/1m 94dB
- Dispersion (-10dB) 1kHz/4kHz 150°/50°



Frequency Response curves on page 65

SP 106 WP

Characteristics	IP44 Weatherproof sound projector (SP 106 B/WP : bi-directional)
Mounting system	Stainless steel U bracket
Rated power	1.5, 3, 6W
Colour	White
Frequency response	150Hz~20kHz
Sensitivity 1W/1m	94dB
Maximum SPL 1m	101dB
Input voltage	100/70/50V
Operating temperature	-20°C~85°C
Weight	2.2kg
Dimensions	ø 150 x 196.5mm