


CELL 10/T

METAL SOUND PROJECTOR

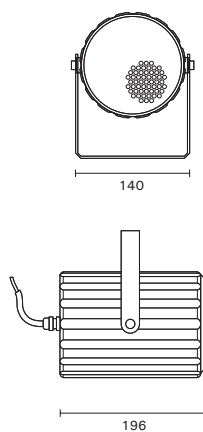

Weatherproof sound projector

Aluminium, painted white
Dual cone polypropylene loudspeaker
Power 1.25, 2.5, 5, 10W
100V transformer
Max/min operating temperature
85°C/-20°C
SPL 1W/1m 92dB
Dispersion (-10dB) 1kHz/8kHz
180°/50°




CELL 10/T

Characteristics	Dual cone weatherproof loudspeaker with transformer
Mounting system	U Bracket
Rated power	1.25, 2.5, 5, 10W
Colour	White RAL 9010
Frequency response	120Hz~18kHz
Sensitivity 1W/1m	92dB
Maximum SPL 1m	102dB
Input voltage	100/70 Volt
Operating temperature	-20°C~85°C
Weight	2.7kg
Dimensions	ø 140 x 196mm

CELL 20/T

METAL SOUND PROJECTORS

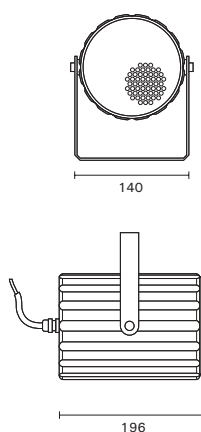

Weatherproof sound projector

Aluminium, painted white
Dual cone polypropylene loudspeaker
Power 1.25, 2.5, 5, 10, 20W
100V transformer
Max/min operating temperature
85°C/-20°C
SPL 1W/1m 89dB
Dispersion (-10dB) 1kHz/8kHz
180°/50°




CELL 20/T

Characteristics	Dual cone polypropylene loudspeaker with transformer
Mounting system	U Bracket
Rated power	20W
Colour	White RAL 9010
Frequency response	120Hz~18kHz
Sensitivity 1W/1m	89dB
Maximum SPL 1m	102dB
Input voltage	100/70 Volt
Operating temperature	-20°C~85°C
Weight	2.4kg
Dimensions	ø 140 x 196mm

CELL 10 T-BIDI

METAL SOUND PROJECTOR

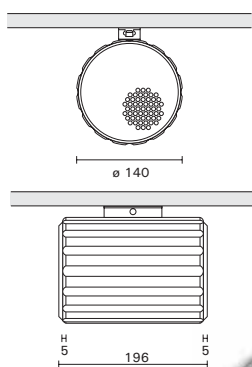

Bi-directional weatherproof sound projector

Aluminium, painted white
Dual cone polypropylene loudspeaker
Power 10W x 2
(2.5, 5, 10, 20W)
100V transformer
Max/min operating temperature
85°C/-20°C
SPL 1W/1m 92dB Dispersion
(-6dB) 1kHz 160° in each
direction




CELL 10 T-BIDI

Characteristics	Dual cone weatherproof loudspeaker bi-directional with transformer
Mounting system	U Bracket
Rated power	(10W x 2) 2.5, 5, 10, 20W
Colour	White RAL 9010
Frequency response	110Hz~18kHz
Sensitivity 1W/1m	92dB
Maximum SPL 1m	105dB
Input voltage	100V
Operating temperature	-20°C~85°C
Weight	3.25kg
Dimensions	ø 140 x 196mm

GB 20 T

OMNIDIRECTIONAL PLASTIC LOUDSPEAKER

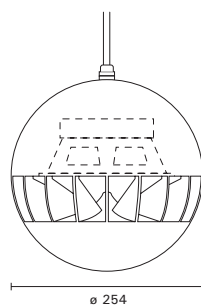

Spherical loudspeaker in ABS

Pendant mounting system
360° horizontal and 140°
vertical dispersion angles
Power 20W
100V transformer
SPL 1W/1m 92dB



GB 20 T

Characteristics	Spherical loudspeaker with transformer
Mounting system	Pendant hanging kit
Rated power	20W
Colour	White RAL 9010
Frequency response	80Hz~18kHz
Sensitivity 1W/1m	94dB
Maximum SPL 1m	107dB
Input voltage	100V
Weight	2.4kg
Dimensions	ø 254mm